



SHELTER STRUCTURES AMERICA

PRODUCT SPECIFICATIONS

SHELTER DOUBLE DECKER DB-SERIES

TENT SPECIFICATIONS

Model	DB10 DB15 DB20
Span Width	10m 15m 20m
Eave Height	8.20m
Ridge Height	9.9m 10.7m 11.5m
Bay Distance	5.00m
Roof Pitch	18°
Longest Component	5.4m 8.0m 10.6m
Maximum Length	Unlimited in 5-meter increment
Max. Windload	115mph

FRAMEWORK

Main Profiles	120*300*5mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

COVER

Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

DB-SERIES DRAWING


Rendering



Gable Drawing

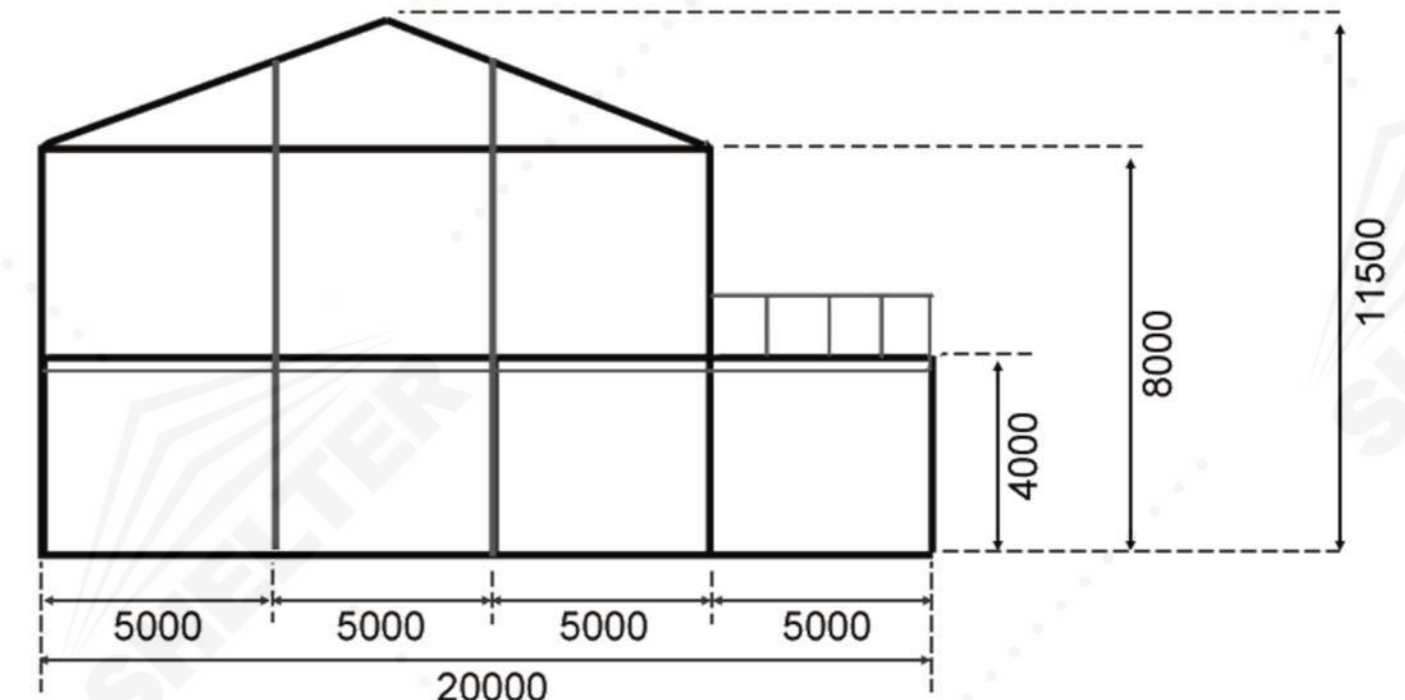

Frame Drawing

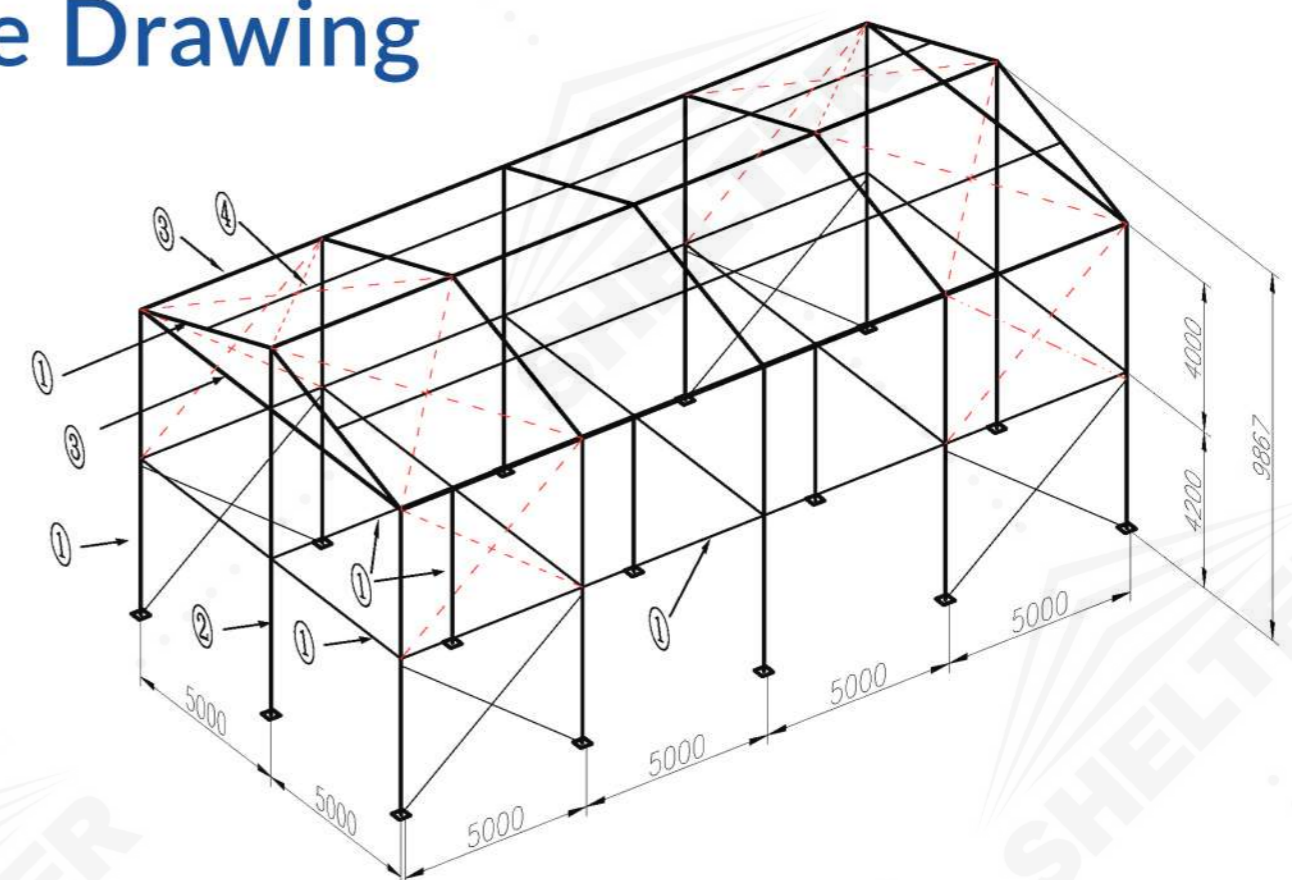

Profile Specifications

Roof Beam Upright Support ①	Gable Upright ②	Eave Purlin ③	Roof Purlin ④



SHELTER STRUCTURES
TENT MANUFACTURER

Shelter Structures America Inc.

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com

C: (954) 559 8759

W: www.shelterstructuresamerica.com

O: (424) 254 9172