



# SHELTER STRUCTURES AMERICA

## PRODUCT SPECIFICATIONS

### SHELTER ARCH-SERIES

#### TENT SPECIFICATIONS

Model	A25
Span Width	25m
Eave Height	4.00m
Ridge Height	7.60m
Bay Distance	5m
Roof Pitch	18°
Longest Component	10.70m
Maximum Length	Unlimited in 5-meter increments
Max. WindLoad	115mph

#### FRAMEWORK

Main Profiles	120*250*4mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

#### COVER

Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

#### CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

### ARCH-SERIES DRAWING


#### Rendering



#### Gable Drawing

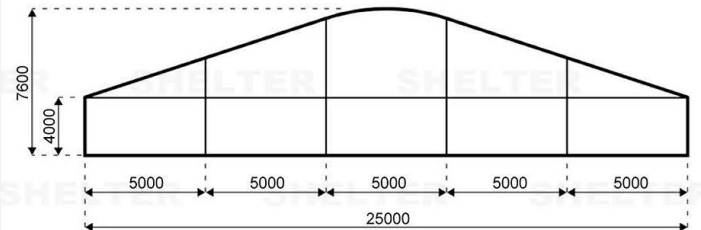

#### Frame Drawing

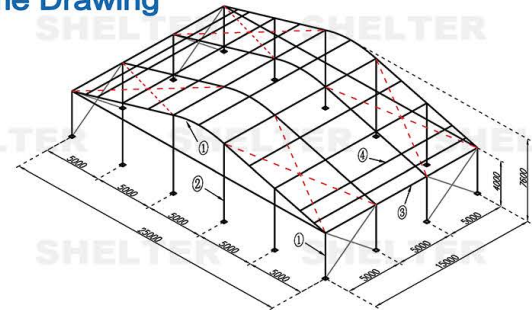

#### Profile Specifications

Upright Support Roof Beam Curved Beam	①	Gable Upright ②	Eave Purlin ③	Roof Purlin ④



**SHELTER STRUCTURES**  
**TENT MANUFACTURER**

**Shelter Structures America Inc.**

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com

C: (954) 559 8759

W: www.shelterstructuresamerica.com

O: (424) 254 9172