



SHELTER STRUCTURES AMERICA

PRODUCT SPECIFICATIONS

SHELTER ARCH-SERIES

TENT SPECIFICATIONS

Model	A30
Span Width	30m
Eave Height	4.00m
Ridge Height	8.30m
Bay Distance	5m
Roof Pitch	18°
Longest Component	10.70m
Maximum Length	Unlimited in 5-meter increments
Max. WindLoad	115mph

FRAMEWORK

Main Profiles	120*300*5mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

COVER

Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

ARCH-SERIES DRAWING


Rendering



Gable Drawing

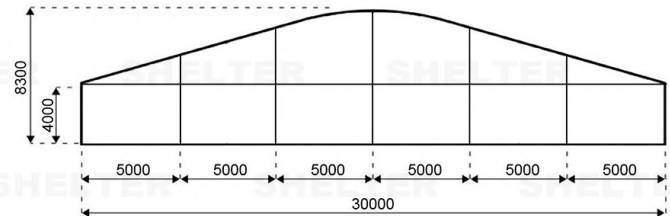

Frame Drawing

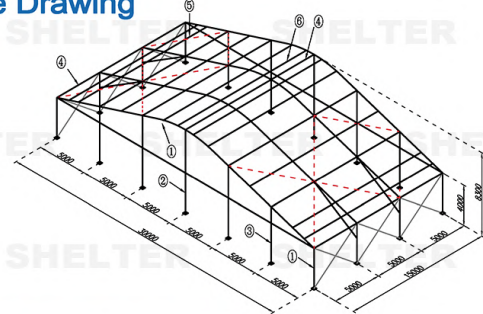

Profile Specifications

Upright Support Curved Beam ①	Gable Middle Upright ②	Gable Upright ③
Eave Purlin ④	Roof Purlin ⑤	Roof Purlin ⑥



SHELTER STRUCTURES
TENT MANUFACTURER

Shelter Structures America Inc.

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com

C: (954) 559 8759

W: www.shelterstructuresamerica.com

O: (424) 254 9172