



# SHELTER STRUCTURES AMERICA

## PRODUCT SPECIFICATIONS

### SHELTER L-SERIES

#### TENT SPECIFICATIONS

Model	L50
Span Width	50m
Eave Height	4.15m
Ridge Height	12.36m
Bay Distance	5m
Roof Pitch	18°
Longest Component	10.80m
Maximum Length	Unlimited in 5-meter increments
Max. Windload	115mph

#### FRAMEWORK

Main Profiles	120*420*6/7mm (4 channel)
Material	Hard Pressed Extruded Structural Aluminum 6061/T6

#### COVER


Material	PVC Coated Polyester Fabric
Features	650 or 850 g/sqm, Premium Grade, High Gloss White or Translucent, Waterproof, UV Resistant
Flame Retardant	DIN 4102 B1, M2; USA NFPA701

#### CONNECTING COMPONENTS


Hot Dipped, Structural Grade Corrosive Resistant Galvanized Steel

### L-SERIES DRAWING


#### Rendering

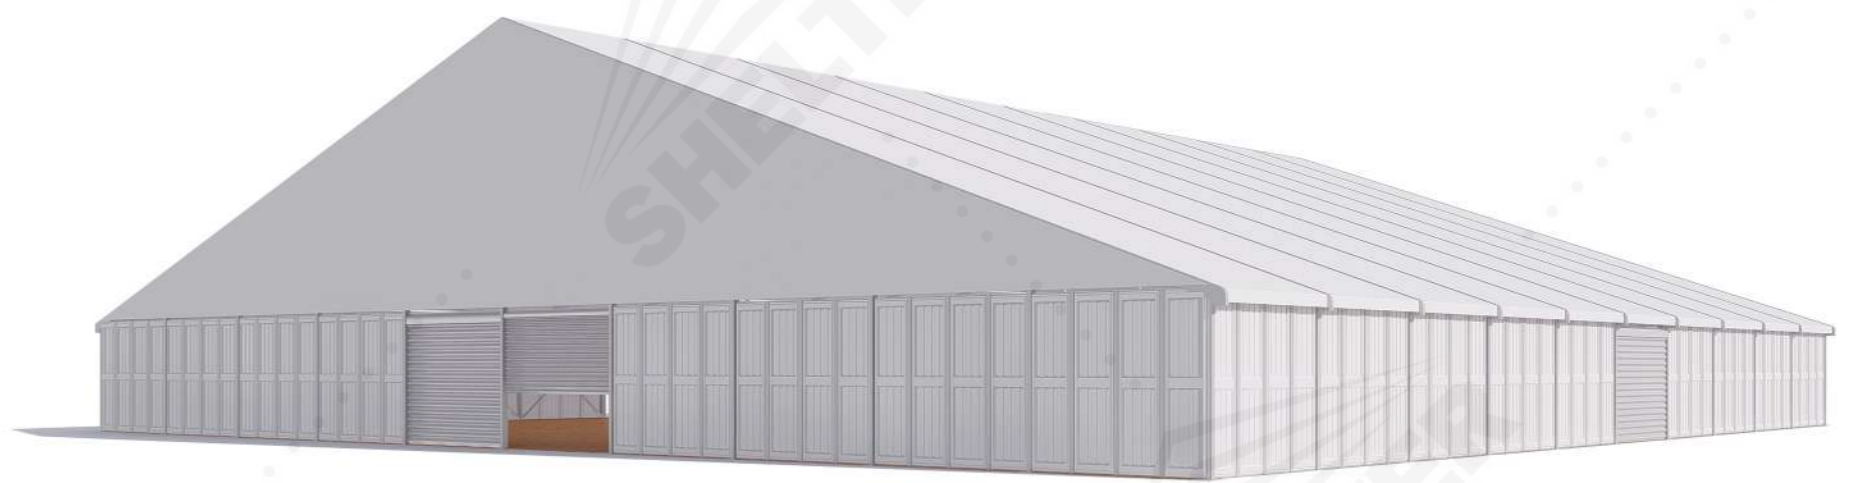

#### Gable Drawing

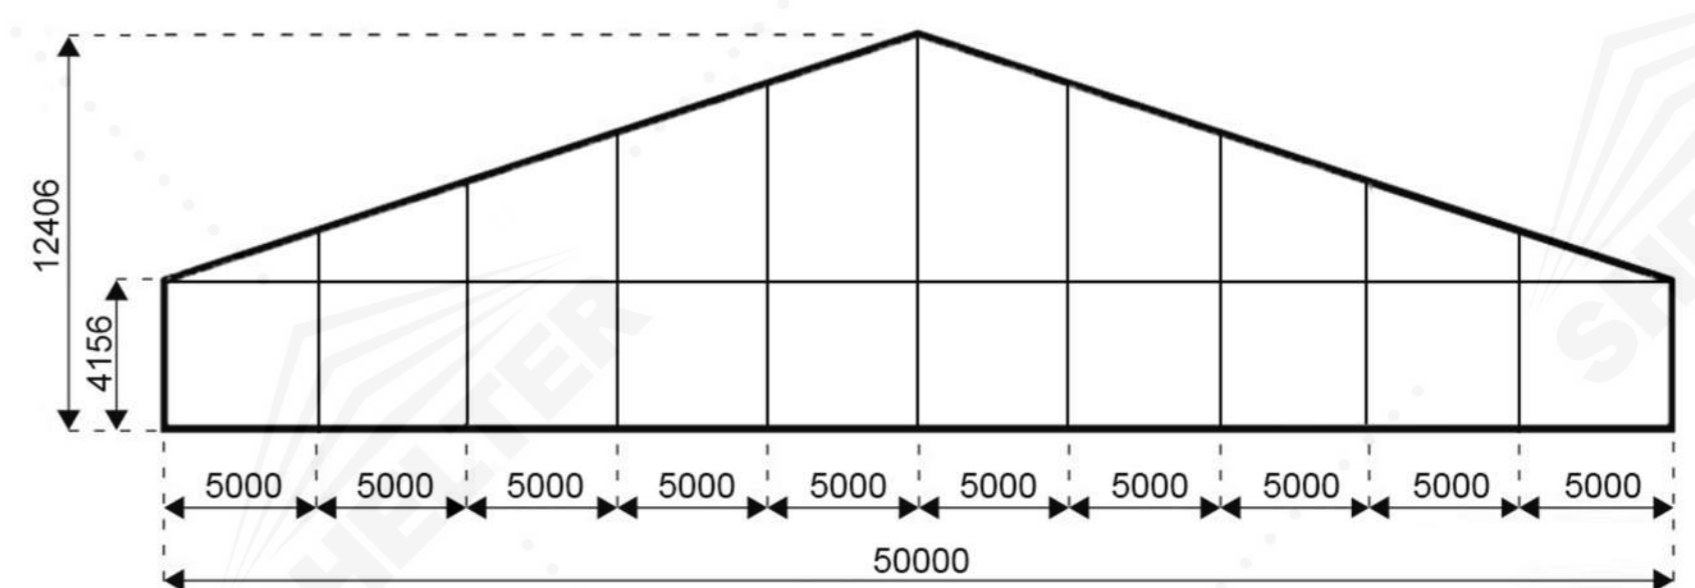

#### Frame Drawing

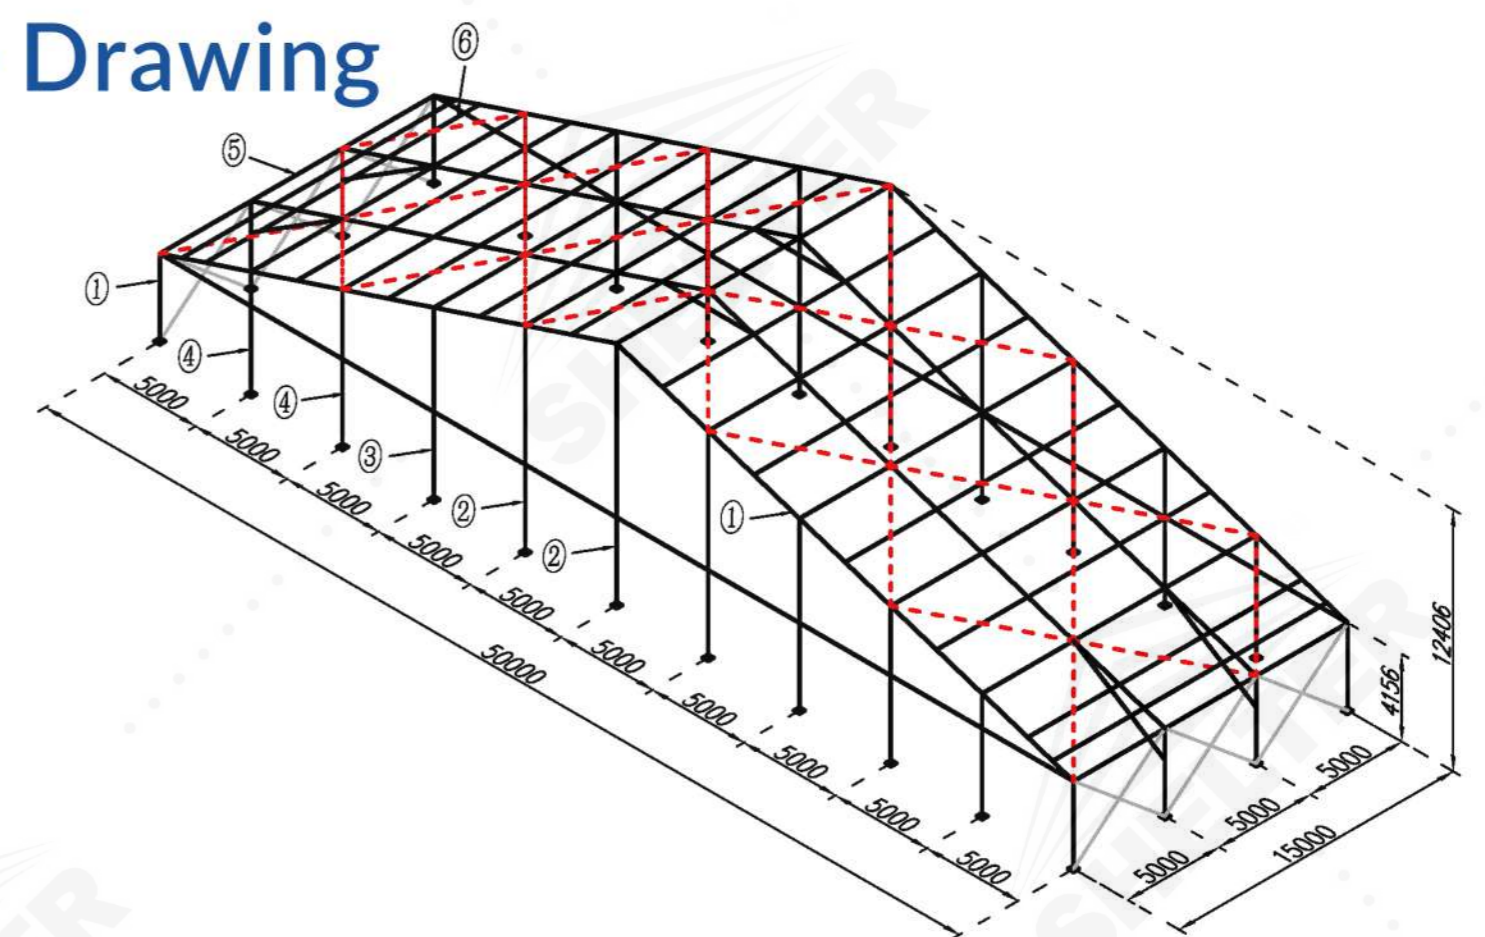

#### Profile Specifications

Upright Support Roof Beam ①	Gable Middle Upright ②	Gable Upright ③	Gable Upright ④	Eave Purlin ⑤
				Roof Purlin ⑥



SHELTER STRUCTURES  
TENT MANUFACTURER

Shelter Structures America Inc.

405 Via Chico Suite 1 Palos Verdes Estates, CA 90274

E: robert@shelterstructuresamerica.com

C: (954) 559 8759

W: www.shelterstructuresamerica.com

O: (424) 254 9172